

# Packing the light engine for CP2315/20-RGB and CP2415/20-RGB models

These instructions provide details for properly packaging the light engine for transportation.

## Affected products

The following products are affected.

- CP2315-RGB
- CP2320-RGB
- CP2415-RGB
- CP2420-RGB

## Tools required

The following tools are required.

- 3 mm hex driver


## Packing the light engine

Follow these instructions to properly package the light engine.




The graphics used in this document are for illustrative purposes only and may not reflect the light engine of your product.


1. Remove the new light engine from the electrostatic discharge (ESD) bag.  
Observe how the ESD bag is tightened to the shipping base plate.
2. Remove the new light engine from the shipping base plate.  
Observe the location of the screws securing the light engine to the shipping base plate.
3. Place the returning light engine onto the shipping base plate.

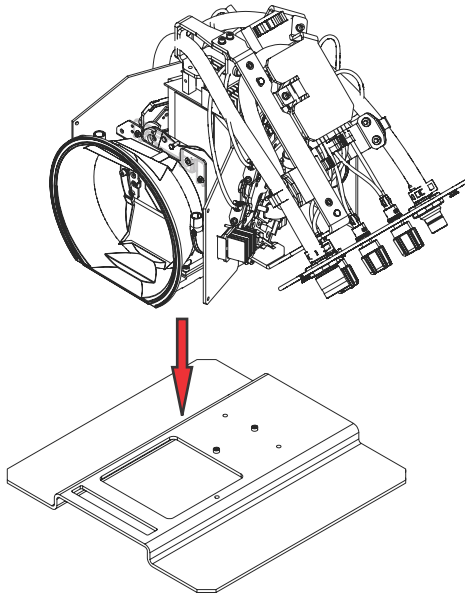


4. To secure the light engine to the shipping base plate, install the three screws.  
Make sure the screws are securely tightened so the light engine does not become detached from shipping base plate.
5. Transfer the shipping bracket from the new replacement light engine to the old light engine being returned.
6. Install the shipping bracket on the convergence plate, sliding the guiding self-clinching pin into place.

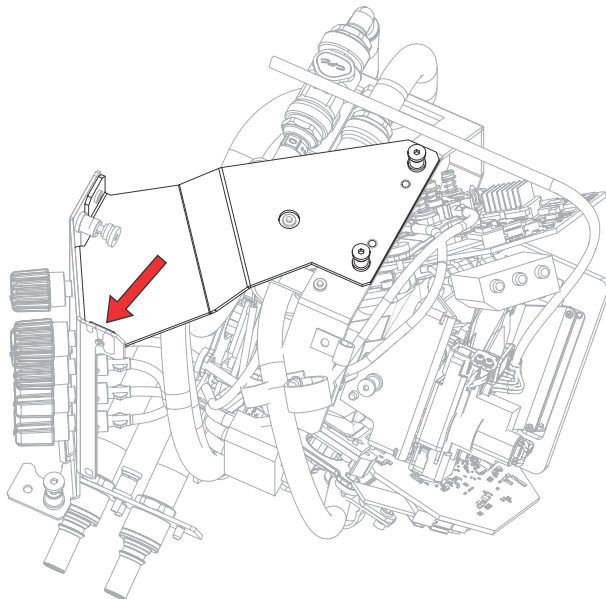

7. To secure the shipping bracket to the light engine, tighten the two captive screws.

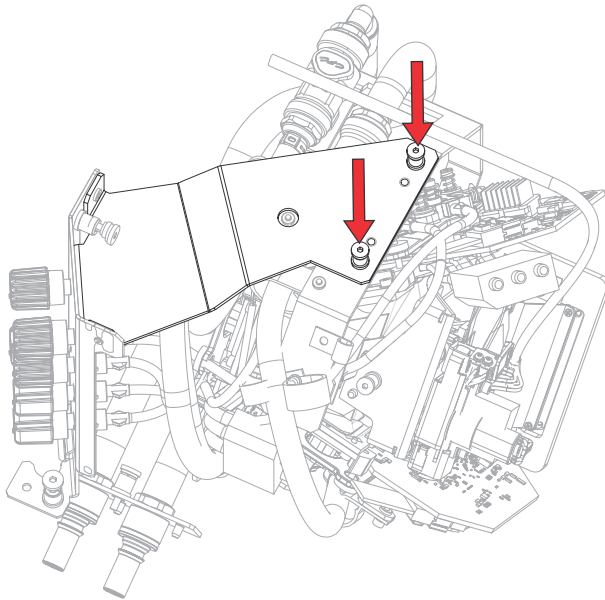

8. To secure the shipping bracket to the convergence plate, install the screw.

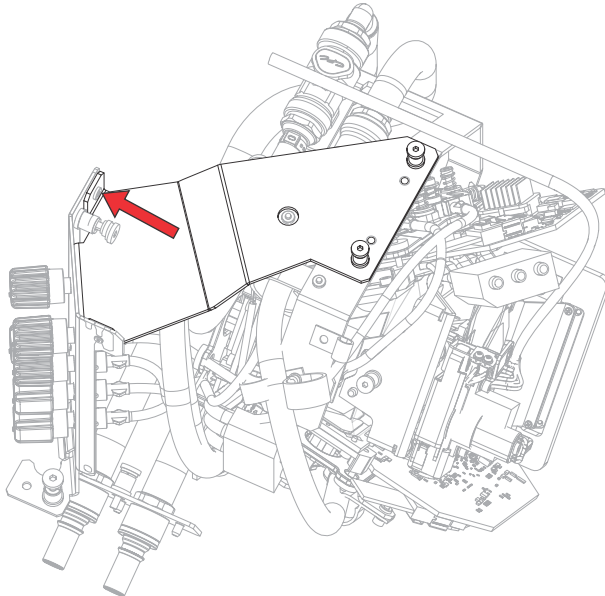

9. To secure any hoses and harnesses from any pinch points, install the zip ties.

10. Place the light engine and base plate assembly into the ESD bag.

Make sure the ESD bag is loose so the base plate slides underneath the plastic lip in the packaging tray.

11. Tape the ESD bag together to cover the light engine.

12. Place the light engine into the packaging insert tray.

Make sure the prism cutout in the shipping base plate is aligned with the prism cutout of the packaging insert tray.



The light engine base plate must sit flat underneath the plastic lip.



13. Insert the outer sleeve into the packaging box.



14. Place the light engine and insert tray into the packaging box.



15. Seal the packaging box for transportation.

## Technical support

Technical support for Christie Cinema products is available at:

- [Support.cinema@christiedigital.com](mailto:Support.cinema@christiedigital.com)
- +1-877-334-4267
- Christie Professional Services: +1-800-550-3061 or [NOC@christiedigital.com](mailto:NOC@christiedigital.com)