

Christie CP4325-RGB

Digital cinema
Screening rooms
Post production



RealLaser illumination. Unmatched cinematic performance.

The Christie® CP4325-RGB pure laser cinema projector brings a premium movie-going experience to mainstream theatres. Featuring CineLife™ electronics and RealLaser™ illumination, this compact, all-in-one DCI-compliant projector excels in image quality and operational lifetime while providing a low cost of ownership. With the CP4325-RGB, exhibitors can impress audiences with incredibly colorful and detailed, true-to-life images while benefiting from an affordable platform that will perform well into the future.

RealLaser. Real smart.

What sets Christie RealLaser apart? We've taken everything we know from being the preeminent manufacturer of RGB pure laser projectors and coupled it with the latest innovations in laser devices. The result is an incredibly efficient and long-lasting light source that drastically outperforms any other cinema illumination platform. The long, stable operational life of RealLaser powered projectors means they provide the lowest cost of ownership of any cinema projector in their class. Make bringing the art of exhibition to the next level a reality.

CHRISTIE®

Specifications		Christie CP4325-RGB
Brightness	nominal	• Up to 25,000 lumens (<25°C ambient) ¹
	lifetime	• >30,000 hours to 80% brightness (<25°C ambient)
Contrast ratio		• Up to 6000:1 ²
Digital micromirror device		• 1.38" Enhanced 4K 3-chip DMD DLP Cinema® • 4096 x 2160 (4K)
Color gamut	native gamut	• >90% Rec 2020 coverage
Processing electronics		• Christie® CineLife™ Series-3 (Series-2 IMB compatible - specific models) ³ • HDMI v1.4a x2 • 16-channel AES (RJ45 x2) • 2K120 / 4K48 fps (w/Christie IMB-S3) • Up to 4K120 upgradable • Built-in automation controller • 3D Sync Connector (12V 1A powered) ⁴
Lens mount configuration		• Fully motorized Intelligent Lens System (ILS™)
Lenses		• 1.13-1.66 • 1.31-1.85 • 1.45-2.17 • 1.63-2.71 • 1.95-3.26 • 2.71-3.89 • 3.89-5.43 • 4.98-7.69
Input line voltage		• Single phase 220V
Power input requirements		• Input A: 200-240 VAC @ 50-60Hz, 17A, 3300W (11,260 BTU/hr) • Input B (UPS input): 100-240 VAC @ 50/60Hz, 10A, 1000W
Cooling		• Liquid pressurized/TEC, self-contained • Heat extraction optional
Laser class		• Class 1 - Risk Group 3
Dimensions (w/o lens)	size	• (LxWxH): 37.2 x 28 x 20.7" (944 x 711 x 525mm)
	weight	• 285lbs (130kg)
Accessories		• Christie IMB-S3 (153-100102-01) • NAS-S3 5.4TB storage (153-101103-01) • Rack mount pedestal (108-416102-01) • Extraction duct adaptor (163-102104-01) • Rack mount pedestal adaptor (163-101103-01)

¹ With existing high brightness cinema lens.

² With new UHC cinema lenses.


³ Currently supports Dolby IMS2000 / IMS3000, GDC SX-3000 / SX-4000.

⁴ Supports all conventional 3D systems except "color separation" based 3D (i.e. 6P) and "single pass polarized" based 3D.


Key features:

- › **Long-lasting, high-performance light source** - Christie RealLaser illumination provides amazing color, extended contrast capabilities and over 30,000 hours of optimal brightness performance
- › **The pinnacle of image quality** - Expansive color gamut with enhanced wavelength diversity and contrast ratios up to 6,000:1 deliver unmatched presentation quality
- › **Christie CineLife electronics** - Streamlined UX-designed interface for simple playback, scheduling and management of cinema content when used with the Christie IMB-S3
- › **Future-proofed** - High Frame Rate capable: 2K 120fps or 4K 48fps for native 3D playback
- › **Compact form factor** - Fits seamlessly into existing booths for easy installation
- › **Backwards compatibility** - Compatible with existing accessories including the Christie Rack Mount Pedestal and cinema lenses for additional cost savings
- › **Fully sealed optics** - Protection from environmental contaminants to maintain optimal performance


Front view




Side view

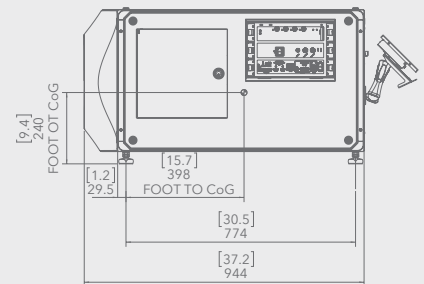

Top view

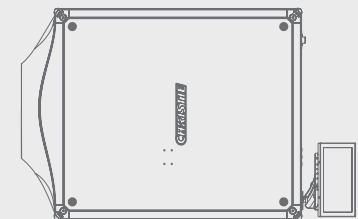

Back view



Corporate offices

Christie Digital Systems USA, Inc.
Cypress
PH: +1 714-236-8610

Christie Digital Systems Canada
Inc.
Kitchener
PH: +1 519-744-8005

Worldwide offices

Australia
PH: +61 (0) 7 3624 4888

Brazil
PH: +55 11 3181-2952

China (Beijing)
PH: +86 10 6561 0240

China (Shanghai)
PH: +86 21 6030 0500

China (Shenzhen)
PH: +86 755 3680 7000

Colombia
PH: +57 (315) 652-9620

Germany
PH: +49 221 99 512-0

India
PH: +91 (080) 6708 9999

Mexico
PH: +52 (55) 4744-1791

Singapore
PH: +65 6877 8737

South Korea
PH: +82 2 702 1601

Spain
PH: +34 (0) 91 633 99 90

United Arab Emirates
PH: +971 (0) 4 503 6800

United Kingdom
PH: +44 (0) 118 977 8000

United States (Arizona)
PH: +1 602-943-5700

United States (Texas)
PH: +1 469-757-4420

For the most current specification information, please visit christiedigital.com

Copyright 2023 Christie Digital Systems USA, Inc. All rights reserved. Our centers of excellence for manufacturing in Kitchener, Ontario, Canada and in Shenzhen, China are ISO 9001:2015 Quality Management System-certified. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. "Christie" is a trademark of Christie Digital Systems USA, Inc., registered in the United States of America and certain other countries. DLP® and the DLP logo are registered trademarks of Texas Instruments. Performance specifications are typical. Due to constant research, specifications are subject to change without notice.
CD3910-CP4325-RGB-Datasheet-Feb-24-EN

